

Roots® Blower



22 URAI

Part Number – 6510202x*

*Replace “x” with shaft location (i.e., L=Left, T=Top, etc.)

- Shaft Configurations available: Left, Right, Top, Bottom
- Detachable steel mounting feet
- Rigid one-piece cast iron casing
- Connections in standard pipe sizes
- Straight, precision machined two-lobe impellers
- Splash oil lubricated gears
- Carburized and ground alloy steel spur timing gears
- Anti-Friction gears
- Ground steel shafts
- Center Timed for rotation in either direction

Also Available in:


- URAI Metric

Direct Drop-in Replacement for:

- Sutorbilt Model 2MP
- Tuthill Model 2002

Quick Specs

Flow Range	to 71 CFM
Max ΔPressure	12 PSI
Max ΔVacuum	15" Hg
Maximum RPM	5275
Minimum RPM	1530
Max ΔT	225°F
Connection Size	1" FPT
Shaft Dia.	0.625"
Min Sheave Dia.	4"
Drive End Lubrication	Grease
Gear End Lubrication	Oil
Oil Sump Gear End Horiz Config	6.1 oz
Oil Sump Gear End Vert Config	3.4 oz
Bare Unit Weight	32 lbs
Shipping Weight	36 lbs
Shipping Container	Box
Box Size (L x W x H)	17" x 16" x 12"
Can Ship via	UPS Insured

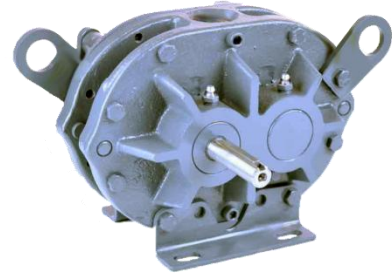

Roots Authorized

Representative
Distributor

Packager

Repair Center

816-207-0090

Sound Enclosures

Custom Fabrication

Blower Packages

Valves, Gauges & Sensors

Spool Pieces

Blower Parts

Oil and Grease

Silencers & Filters

Filter Elements

Air Handling Equipment

Screw Conveyors



5155 E Front Street

Kansas City MO 64120

info@jlcomponents.com

816-207-0090

www.jlcomponents.com